




FLASH series are manufactured in accordance with the needs of conference and theater halls and in ergonomic designs targeting comfort that fits the audience perfectly.

FLASH | F –BSF series are in line with the needs of the investor and the audience; It is enriched with lateral legs, fabric or leather upholstery.

The combination of design and comfort makes the series the ideal choice to equip Auditorium and Theater Halls, Conference and Convention Centers, Performing Arts Centers, Corporate and Public Building Halls, Education and School Halls.



DIMENSIONS (mm)

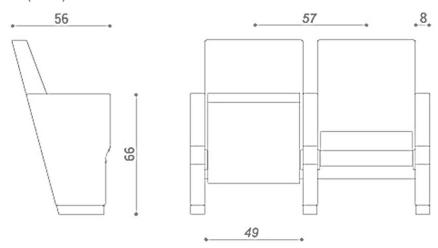

CHARACTERISTIC FEATURES

FLASH | F-BSF

- (F) The lateral feet are fully upholstered with padded cover.
- (BSF) Both backrest and seat padding are fully upholstered with padded cover.

Dimensions

- Centre-to-Centre dimension is 57 cm.
- The nominal space for user is 49 cm.

Seat and Backrest units

- All paddings are produced with cold moulded CMHR polyurethane foam technology,
- Both backrest and seat padding has a carefully crafted ergonomic design, density 50-60 kg/m3.
- The seat padding is single block of moulded polyurethane foam that incorporates internal metal frame structure, plus supported with an internal flat springs structure to provide sitting comfort long time.
- The backrest padding is single block of moulded polyurethane foam that incorporates internal metal frame structure which, due to their shape and composition, offers great back and lumbar support.
- Upholstered with padded cover, removable by means of a zipper.
- Tip-up seat folds automatically with inside weight balance system. Totally silent and maintenance free.

Optional

- Controlled Slow Rising System by means silent, controlled slow movement with no bumps.
- The seat folds up automatically with controlled slow movement by a pneumatic piston mechanism located at the side panel. Totally silent and maintenance free.

Armrests

- Fixed and shared armrest box in ergonomic design.
- Fully upholstered with padded cover.

Structure

- The lateral feet are single block unit made of unified double 40 mm thick MDF boards designed and produced to provide durability and long life.
- The lateral feet are joined to a steel base and fixed to the floor using metric screws or other suitable type of anchorage for each type of surface.
- The metal parts are painted electrostatic powder paint. Coat thickness 80 micron ± 10.
- The fully upholstered backrest padding is fixed to a metal structure, which is joined to the lateral legs with a concealed insertion system provided strong durability.
- The system is very resistant and ensures the perfect alignment of the backrests when forming a row.

Options

- Seat, row numbering and logo embroidery.
- Variety of foam density.
- Variety of fabric with abrasion, fading and non-flammability characteristics.
- Variety of high quality faux and genuine leather.

CERTIFIED PRODUCTION

In our production plant we have implemented the quality management system ISO 9001:2015, the environmental management systems ISO 14001:2015, the safety management system OHSAS 18001:2007 are standard.

